

PowerPlex M300

Compact Filtration / Polisher
with Integral OmniPlex Network Controller

BACnet, Modbus, Metasys N2, or LON Communications



General Description

The PowerPlex Filtration / Polisher is designed to circulate and clean fuel stored diesel fuel at critical facilities. Filtration / Polishing has become an important aspect of emergency power reliability: (a) critical facilities store increasing amounts of fuel onsite to assure continuity of operation and this fuel has low turnover in operation, (b) as diesel fuel ages, particulates form which can increase the wear on generator engine parts, (c) fuel storage tanks accumulate water through vapor condensation and this water can encourage bacterial growth, and (d) newer diesel engines with improved emissions technology require higher purity fuel to prolong engine life.

The M300 Filtration / Polisher has an innovative compact design has a minimal footprint for Filtration / Polishing of tanks from 2 to 200 cubic meter capacity

The mechanical design is based on Viking pumps and Racor filters and is complete with strainers, check valves, ball, valves, pressure / vacuum gauges, relief valves. The unit is mounted on an integral containment with leak detection monitoring.

The Filtration / Polisher includes a motor starter panel, or optional VFD drive, with disconnect switch.


The OmniPlex Controller provides Filtration / Polisher operation and monitoring with HOA switches and an emergency stop. The OmniPlex screen provides a summary of operating parameters and allows selection of special operating modes. The Controller networks with other system controllers using Ethernet, and directly to Building Management Systems with an option

PowerPlex M300

Compact Filtration / Polisher
with Integral OmniPlex Network Controller

EMERGENCY POWER FUEL SYSTEMS

2 of 4

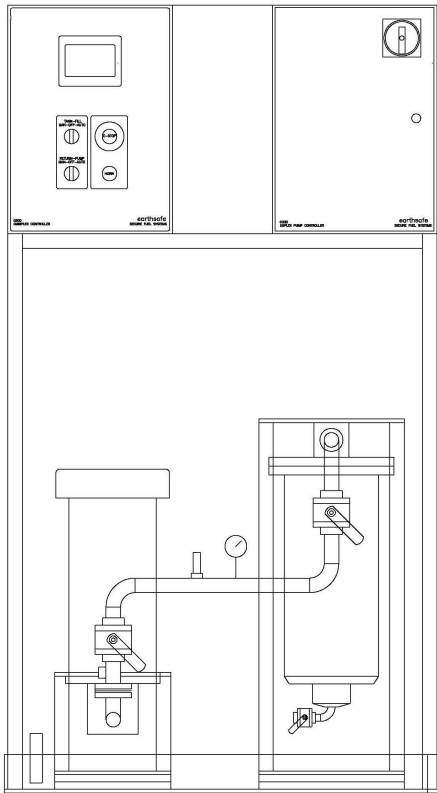

PowerPlex M300 Filtration / Polisher

Dimensions	760 L x 460 W x 1500 H												
Flow Capacity (GPM)	20-40-60-80-100												
Pump Type	Viking Iron Body Pump												
Pressure Capacity	70 – 1700 kPA												
Motor	Close Coupled IP55 110 / 230 VAC – 1PH – 50 Hz 415 VAC – 3 PH – 50 HZ												
Horsepower	<table border="1"> <thead> <tr> <th>LPM</th> <th>KW@350 kPA</th> </tr> </thead> <tbody> <tr> <td>20</td> <td>0.37</td> </tr> <tr> <td>40</td> <td>0.55</td> </tr> <tr> <td>60</td> <td>0.75</td> </tr> <tr> <td>80</td> <td>1.1</td> </tr> <tr> <td>100</td> <td>1.5</td> </tr> </tbody> </table>	LPM	KW@350 kPA	20	0.37	40	0.55	60	0.75	80	1.1	100	1.5
LPM	KW@350 kPA												
20	0.37												
40	0.55												
60	0.75												
80	1.1												
100	1.5												
Filter Unit	Racor FBO-14												
Accessories	SS Flex Connectors Inlet Strainers Outlet Check Valve Leak Sensor Inlet Suction Gauges Outlet Pressure Gauges Motor Disconnect Switches												
Construction	Welded Steel Construction Containment Basin (25 L) Industrial Enamel Finish Color RAL 7035 (Light Gray) Option: Weatherproof Enclosure												
Inlet / Outlet Connections	25 mm Threaded (20-100 LPM) Optional: Plain End for Weld												
Controls	C820 OmniPlex Module												
Motor Disconnect / Drives	C233 Single Standard Service C235 SingleVFD Drive												
Optional Equipment	01 Weatherproof Enclosure 02 Less OmniPlex Controller CentraPlex System Control) 03 X-Proof Motors and Disconnects 04 Add Electronic Meter 05 Dual Tank Service 06 Multi-Tank Service												

Ordering Information


M300.20.XX.MM 20 LPM Filter Polisher
M300.40.XX.MM 40 LPM Filter Polisher
M300.60.XX.MM 60 LPM Filter Polisher
M300.80.XX.MM 80 LPM Filter Polisher
M300.100.XX.MM 100 LPM Filter Polisher

XX=11 110 VAC – 1 Phase
 XX=21 230 VAC – 1 Phase
 XX=43 415 VAC – 3 Phase

MM=01 1 Micron Filter / Separator
 MM=05 5 Micron Filter / Separator
 MM=10 10 Micron Filter / Separator
 MM=25 25 Micron Filter / Separator

PowerPlex M300

Compact Filtration / Polisher
with Integral OmniPlex Network Controller

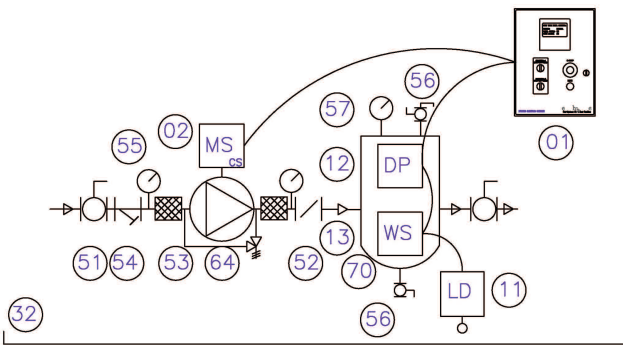

Filter – Pump Set

Item	Qty	Description
1	1	OmniPlex Control Panel
2	1	Pump Control Panel
12	1	Filter DP Sensor
13	1	Filter Water Sensor
33	1	Pump / Filter Containment
51	2	Ball Valve
52	1	Check Valve
53	2	Flex Connector
54	1	Strainer
55	2	Pressure / Vacuum Gauge
56	2	Valve – Filter Drain-Vent
57	1	Gauge - Filter
64	1	Pump - Filtration
70	1	Filter Vessel / Cartridges

Filter / Polishing Unit

The control panel operates the pump on a programmable timed cycle to circulate fuel from the storage tank through the filter and returning to the storage tank. The unit can be operated with a tank selection system to provide filtration for multiple tank units.

The programmable timer allows setting of the start time / date, the ON cycle time, and the OFF cycle time for the AUTO mode. The programmable timer allows setting of the cycle duration for the MAN mode, to start the pump upon manual initiation and stop it after the defined cycle.

The control panel monitors the filter unit for high differential pressure indicating a need for filter change, and water accumulation. The leak sensor is also monitored and disables the unit from operation in MAN or AUTO mode.

The display indicates: (a) normal or alarm condition, (b) cycle active status, (c) time to start / stop cycle, (d) alarm indication for differential pressure, water accumulation, or leak, (e) pump status. A common alarm output relay and a serial data interface are provided for BMS integration.

PowerPlex M300

Compact Filtration / Polisher
with Integral OmniPlex Network Controller

Operating Modes:

The system is programmable for common operating modes:

- Continuous Operation
- Weekly Timed Start and Operating Duration
- Manual Start and Operating Duration
- Weekly Timed Start and Gallons to Process (with optional meter)
- Manual Start and Gallons to Process (with optional meter)

Selecting a Flow Rate:

Tank Size Liters	Turnover per Week with 20 LPM Continuous Run	Turnover Cycle Time (Hours)			
		20 LPM	40 LPM	60 LPM	80 LPM
20,000	10	16	8	6	4
40,000	5	33	16	12	8
80,000	2	66	33	24	16
120,000	1	100	50	38	25
160,000	1	128	64	48	32