


## Specifications —

- Hot forged brass body
- Hard chrome-plated ball
- Blowout proof stem
- Teflon seals
- Dacrotized carbon steel handle with PVC grip  
Fig. 691B handle is lockable
- UL listed for use with flammable liquids (Subject YRBX, YRBX7)  
Sizes 1/4"—2" 600 psig, Sizes 2 1/2"—4" 450 psig
- UL listed for LP-gas shut-off (Subject YSDT, YSDT7)  
Sizes 1/4"—2" 600 psig, Sizes 2 1/2"—4" 450 psig
- AGA approval on 1/4"—4" sizes
- Meets WW-V-35
- Threads NPT ANSI B.1.20.1
- Temperature range -40° to 350°F
- FM approval 1/4"—2"
- CSA approval
- STI - UL2244 listing

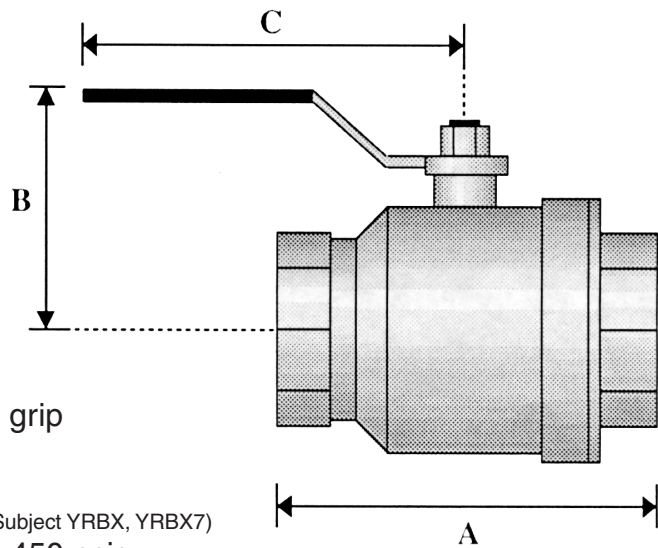

| SIZE        | 1/4"  | 3/8"  | 1/2"  | 3/4"  | 1"    | 1 1/4" | 1 1/2" | 2"    | 2 1/2" | 3"     | 4"     |
|-------------|-------|-------|-------|-------|-------|--------|--------|-------|--------|--------|--------|
| Dimension A | 1.771 | 1.771 | 2.322 | 2.519 | 3.188 | 3.661  | 4.015  | 4.763 | 6.141  | 6.968  | 8.504  |
| Dimension B | 1.496 | 1.496 | 1.692 | 1.968 | 2.125 | 2.874  | 3.11   | 3.385 | 5.196  | 5.551  | 6.062  |
| Dimension C | 3.228 | 3.228 | 3.937 | 4.724 | 4.724 | 6.220  | 6.220  | 6.220 | 10.039 | 10.039 | 10.039 |
| Port Size   | .314  | .393  | .590  | .787  | .984  | 1.259  | 1.574  | 1.968 | 2.559  | 3.149  | 3.937  |
| Weight      | .30   | .30   | .50   | .80   | 1.17  | 1.93   | 2.40   | 4.02  | 10     | 13.65  | 22     |

Note: All dimensions are in inches except weight which is in pounds.