


Service Station Hardware



Model 709 Warden® AST Overfill Prevention Valve

The EBW Warden® is designed to provide a positive shut-off during a pressurized fill delivery on an aboveground storage tank. It eliminates spills and overfills, avoiding costly cleanup expenses and ground contamination. The Warden is fully adjustable to provide shut-off in various height and capacity above ground tanks.

The Warden is designed to fit into a 4" fill riser making installation on new and existing locations simple and quick. Designed with inverted floats for use in small or large rectangular tanks. Requires 4" minimum ullage.

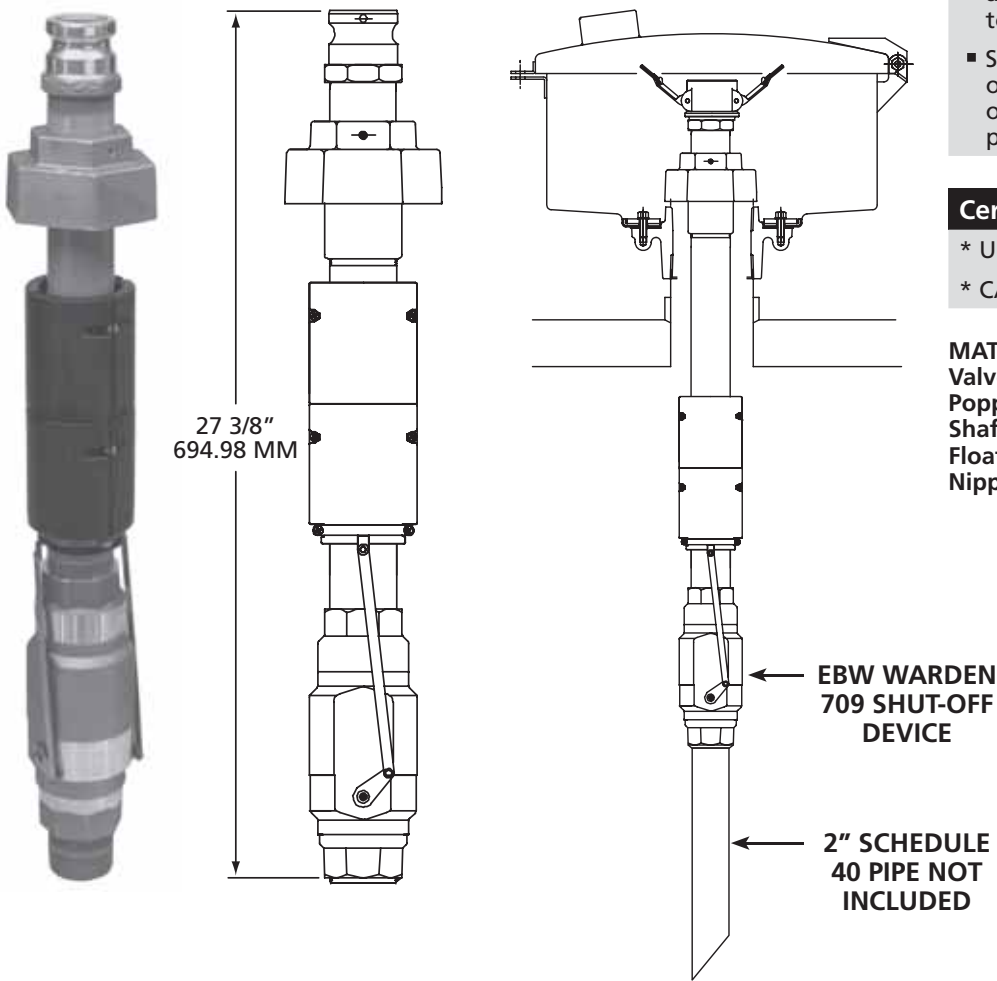

Design Highlights & Advantages

- Cylindrical float design eliminates interference with tank walls and cross braces.
- 100 psi working pressure rating.
- Flow rate 200 gpm at 20 psi.
- No minimum flow rate.
- Ships complete with upper nipple and tight fill adaptor with crossbar to prevent open fills.
- Simple installation - simply thread onto a 4" fill riser to install. Length of upper tube determines shut-off point.

Certifications/Listings

- * ULC file CMH 21090
- * CARB Approved AGT 98-1

MATERIALS
Valve Body: Aluminum 356-T6
Poppet: Aluminum 356-T6
Shaft: Stainless steel
Float: High density polyethylene
Nipple: Epoxy coated black iron pipe

NOTE: The Warden is recommended for use with clean product only. Contaminated product may cause erratic operation or valve failure

709-420-01

PART	DESCRIPTION	LBS.	KG
709-420-01	4" overfill with inverted floats	12.50	5.67
774-212-20	2" dust cap	1.25	.57