


LM4P

LM4P: Lube-Waste Oil Transfer Station With Pump for Generator CHP Applications

Fill Station for delivery with On-Board Pump. 2 inch tight-fill hose adapter and cap, shutoff valve, check valve, actuated valve. Optional strainer or filter. Controller monitors high level sensor for 85-90-95% points with audible and visual alarms. Optional analog sensor and display for tank gallons, fuel height, and % full.

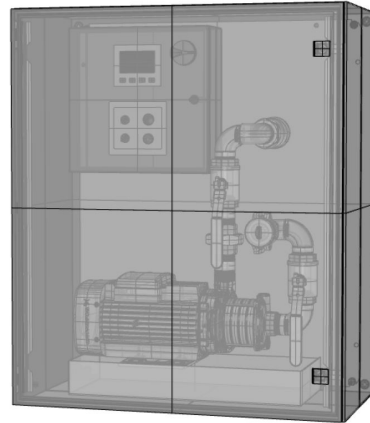

Dimensions	30"W x36" H x 12"D (600W x 600H x 300D)
Flow Capacity	25 GPM (100 LPM)
Pump Type	Positive Displacement Viking H475 Series
Pressure Capacity	100 PSI (690 kPa)
Inlet / Outlet (FNPT)	2 IN (50) Standard
Weight (Estimate)	200 LB (50 KG)
Standard Accessories	Hose Adapter and Cap Manual Ball Valve Check Valve Actuated Ball Valve 3 Point High Level Sensor for 85-90-95% Levels
Construction	Stainless Steel Construction Containment Basin (3 GAL)

Motor	TEFC (IP 55)
Power	120-230 VAC, 1P, 50-60 Hz 0.75 – 1.5 HP (0.55–1.1KW)
Controller	C1 Controller
Output Relays (Dry Contact)	Valve Open Fill Alarm
Interface	Fill-Off-Jog Select Power ON Light Valve Open/Pump ON Light Level Alarm Light Audible Horn Silence Pushbutton
Analog Level (Option)	4-20 mA Transmitter Level Display (% Full/ GAL)
Optional Accessories	Floor Stand C8 Control Modbus Interface Dual-Tank Control
How to Order	M4P.1 Single Tank Fill M4P.2 Dual Tank Fill