


M5_{DT}

M5DT: Day Tank UL142 Cubic with Containment

- UL 142 Cubic Steel Tank with Containment
- Accessories: Emer. And Standard Vent Caps, Direct Read Gauge, Inspect Port, Engine Suction Pipe and Return Fittings
- C1 Control Panel with High, Low, Leak Alarm, Output Relays, 4-Point Level and Leak Sensor
- Standard Configuration is Inlet Solenoid Valve for Remote Pump Refill. Optional 3-GPM Simplex or Duplex Suction Pump for Refill. Optional 7 GPM Return Flow Pump.

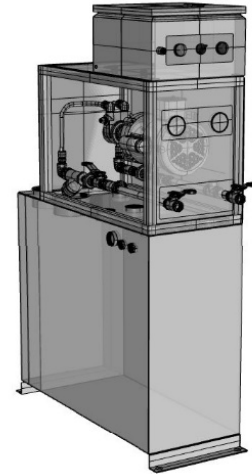

Tank Specification	UL 142 Steel Cubic DW Tank Coating Enamel (Epoxy Opt)
Controller	C1 Control Panel
Power (With Pump)	120-230 VAC, 1P, 50-60 Hz 0.33 – 1.5 HP (0.25–1.1KW)
Interface	Man-Off-Auto Select Power ON Light Fill Active Light Alarm Light Hi-Lo-Leak
Output Relays (Dry Contact)	Remote Pump Start High and Low Level Leak Alarm Common Alarm
Standard Accessories	Emer and Standard Vent Caps Level Indicator, Gauge Port Inlet Solenoid Valve (1/2"- 25), Ball Valve, and Strainer 4-Point Level and Leak Sensor
Optional Accessories	C8 Controller Analog Level 4-20mA
Pump Options	SP3-Simplex Supply 3 GPM DP3-Duplex Supply 3 GPM RP7-Return Pump 7 GPM
Pump Spec	Positive Displacement Viking H475 Series TEFC (IP 55) Motor

Model	GAL	WxLxH IN	Liter	W.L.H CM
M5DT.025	25	14x30x48	100	36.76.122
M5DT.050	50	14x30x60	200	36.76.152
M5DT.075	75	14x42x60	300	36.106.152
M5DT.100	100	14x54x60	400	36.137.152
Other Equipment				
Pumps 3-30 GPM Alternate Voltages and HP (KW) Fuel Heaters and Coolers Flow Sites, Sensors, and Meters Filters and Strainers Actuated Ball Valves Dual Inlet Control Valves Hand Pumps Fire Safety Valves Anti-Siphon Valves Suction Foot Valves Press- Vacuum Gauges/Sensors Temperature Sensors and Control				